


PROFIBUS Tester 5 (BC-700-PB)

Quick and Easy Testing of Bus Physics, Bus Communication and Cabling

PROFIBUS Tester 5 (BC-700-PB) is a powerful diagnostic and troubleshooting tool for testing the cables, measuring the signals and analyzing the communication of PROFIBUS networks. It is battery-powered and provides a graphical display, allowing for quick results when working in stand-alone mode. Optionally, also PROFIBUS PA network can be analyzed. In addition, PROFIBUS Tester 5 (BC-700-PB) supports the export of test results for advanced analysis.

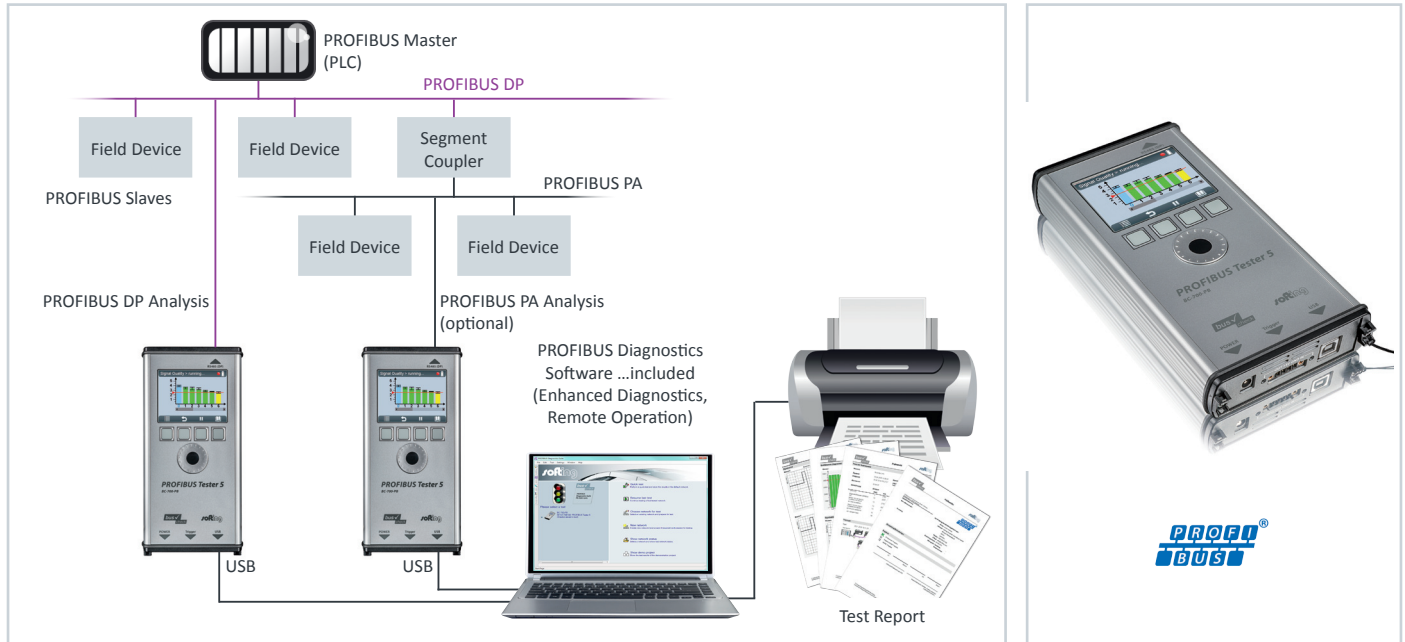

Testing Bus Cabling, Bus Physics and Bus Communication “All-In-One”

- Combination of signal tester, storage oscilloscope, protocol analyzer, master simulator and cable tester functionality in a single diagnostics tool
- Stand-alone mode plus extended PC-based diagnostics
- Suited for installation, setup and commissioning, documentation, acceptance testing, network optimization, preventive maintenance, troubleshooting as well as laboratory tests

Highly Mobile Bus Tester ...Computer Optional

- Battery-powered operation without the need for additional power supply
- Graphical display providing easy-to-understand presentation of test results
- Comprehensive network tests in stand-alone mode; no computer required

Enhanced Diagnostic Features Through PC-Based Software (Included)

- Many additional features for executing, analyzing and managing tests (Trend, Topology Scan, Master Simulator, Oscilloscope, Frame Analyzer)
- Quick Test and User-Controlled Test for easy network status at the push of a button
- Generation of test reports describing status of the PROFIBUS installation
- Suitable for range of user types: novice to fieldbus specialists

Optional Measuring Adapter for MBP (Manchester Coded Bus Powered) Physics

- Specific signal analysis supporting MBP Physics (feeding voltage, signal deviation, signal polarity, bitrate divergence)
- Complete protocol analysis directly at PROFIBUS PA segment

Technical Data

Diagnostics Functionality

Protocol and Frame Analysis	PROFIBUS DP-V0 and DP-V1, automatic baud rate detection in the range of 9.6 kbit/s ... 12 Mbit/s
Signal Analysis ...	PROFIBUS DP-V0, DP-V1, FMS and MPI
... via EIA-485	Signal quality index: 0 ... 5,000, determined from signal level as well as signal/noise ratio and rise time; signal sampling with 8/16 samples per bit
... via MBP	Fieldbus feeding voltage: 0 V ... 35 V at 0.1 V resolution, signal level: 100 mV ... 1,200 mV at 10 mV resolution, signal polarity, bitrate divergence: $\pm 1.2\%$ at 0.01 % resolution, signal sampling with 128 samples per bit
Oscilloscope Display (not available for MBP)	Test range: ± 5 V at 10 mV resolution (differential), 0 V ... 15 V at 15 mV resolution (A or B to DGND); sampling rate: up to 384 Msamples/s; sampled points: 2,400 (signal details), 8,192 (oscilloscope analysis)
Topology Scan (not available for MBP)	Active, maximum distance: 230 m, accuracy: ± 2 m
Cable Test (not available for MBP)	Active, supported cable segment length: 5 m ... 1,500 m, accuracy: 5 %

Operation	Via graphical colour display, four function keys and scrollwheel including central push-button or via PC/notebook Display localization: EN, DE, ES, FR, IT, PL, PT
-----------	---

Internal Memory Capacity	3 user-definable network directories (segment and test location) for storing quick tests, trend logs and cable test results Trend logging: max. 99 hours
--------------------------	---

Trigger	IN: L = 0 V .. 0.8 V; H = 2.4 V .. 24 V; pulse > 10 μ s, active high OUT: approximately 5 V, active low (connection to storage oscilloscope)
---------	---

PC Operating Software	PROFIBUS Diagnostics Suite, see separate datasheet for details
-----------------------	--

Connectors

EIA-485 (PROFIBUS DP)	PROFIBUS D-sub connector, 9 pins, power supply for external bus termination
MBP (PROFIBUS PA)	Connector, 3 pins, for screw terminals at optimal measuring adapter, measuring cable set including 3 probes (adapter for MBP measurement is attached to D-sub connector)
USB	V 2.0, high speed 480 Mbit/s, galvanically isolated

Dimensions (H x W x D)	35 mm x 220 mm x 110 mm
------------------------	-------------------------

Power Supply	Built-in three-cell lithium-ion battery supporting 11.1 VDC or external AC adapter 100 VAC ... 240 VAC, 50/60 Hz (galvanically isolated) The rechargeable battery has a runtime of up to 5 hours (runtime depends on the performed test functionality and rate of wear of the rechargeable battery), battery is charged via external AC adapter
--------------	--

Operating/Storage Temperature	Operating temperature: 0 °C ... 50 °C, storage temperature: -20 °C ... 70 °C
-------------------------------	--

Relative Humidity	Air humidity: 10 % ... 90 % without condensation
-------------------	--

Weight	Test tool, no cable: approximately 0.75 kg; complete carrying case: approximately 4.2 kg
--------	--

Conformity	CE, FCC, VCCI
------------	---------------

Scope of Delivery

Hardware	PROFIBUS Tester 5 (BC-700-PB), power supply unit 100 VAC ... 240 VAC, 50/60 Hz with connecting cables for Europe and USA, adaptor cables, carrying case Measuring adapter BC-700-H1, measuring cable set (for PROFIBUS PA option)
Software	PROFIBUS Diagnostics Suite (PC software for Windows on CD-ROM) PROFIBUS Tester 5 (BC-700-PB) upgrade license (on CD-ROM, for PROFIBUS PA option)
Documentation	Device manual, "Getting Started" manual

Order Numbers

DDA-NN-006014	PROFIBUS Tester 5 (BC-700-PB)
DDL-NL-006010	PROFIBUS PA option for PROFIBUS Tester 5 (BC-700-PB) (PROFIBUS Tester 5 (BC-700-PB) serial number required for order placement)

Additional Products and Services

ACA-NN-006031	EIA-485 D-Sub adapter cable for testing operational networks with reduced influence on segment operation
ACA-NN-006033	D-Sub to M12 adapter set with T-piece and M12 bus termination for PROFIBUS DP
PB-LSZ-CHB3	Digital fieldbus leakage current clamp for locating EMC problems, 40 Hz ... 1,000 Hz, Min/Max, Data Hold, measuring cables, supplied in handy case (fits into empty compartment of carrying case)
BC-PBMB-PB-S	D-Sub service interface with active bus termination and 90° angled connector for PROFIBUS DP
BC-M12DP-PB	M12 service interface for PROFIBUS DP, comprising M12 T-piece, end cap, M12 connection cable (1 m)
TRA-PB-TECH	Training „PROFIBUS Technology“, 2 days
TRA-PB-TS	Training „PROFIBUS Troubleshooting“, 3 days

optimize!
softing

Your local Softing Contact

Softing Industrial Automation GmbH
Richard-Reitzner-Allee 6
85540 Haar / Germany
Tel.: +49 89 456 56-340
Fax: +49 89 456 56-488
info.automation@softing.com
http://industrial.softing.com

Softing Industrial Automation GmbH
Äußere Sulzbacher Straße 159-161
90491 Nürnberg / Germany
Tel.: +49 911 544 27-0
Fax: +49 911 544 27-27
info.automation@softing.com
http://industrial.softing.com

Buxbaum Automation GmbH
Thomas-Alva-Edison-Straße 1
7000 Eisenstadt / Austria
Tel.: +43 2682 704 560
Fax: +43 2682 205 77 00-5610
office@myautomation.at
http://myautomation.at

Softing Inc.
US Headquarter
7209 Chapman Highway
Knoxville, TN 37920 / USA
Tel.: +1 865 251 52 52
Fax: +1 865 579 47 40
info@softing.us
http://www.softing.us

Softing Inc.
US Sales Office
29 Water Street, Suite 301
Newburyport, MA 01950 / USA
Tel.: +1 978 499 96 50
Fax: +1 978 499 96 54
info@softing.us
http://www.softing.us

Softing Italia Srl
Via Padre Massimiliano Kolbe, 6
20090 Cesano Boscone (MI) / Italy
Tel.: +39 02 450 51 71
Fax: +39 02 450 41 41
info@softingitalia.it
http://softingitalia.it